



**WE BUILD RIDERS'
CONFIDENCE.**

WWW.RACINGBOY.COM.MY



MOTORCYCLE GOGGLES HD LENS

INSTRUCTION MANUAL

A GLOBAL BRAND OF 

AWARDS:



ABOUT YOUR GOGGLES:

RCB X-Series goggles comply with European Directive 89/686/EEC in accordance with EN1938 : 2010.

RECOMMENDATIONS FOR USE:

RCB X-Series goggles can be adjusted to any face or helmet shape with the two buckles.

FILTER CATEGORIES:

Please refer to marking on packaging for lenses to each respective goggle.

Grey lens coating silver	S3
Grey lens coating REVO blue	S2
Grey lens coating red	S3
Grey lens coating gold	S3

Clear lens	S0
Dark smoke lens	S2
Light smoke lens	S1

ANTI-SLIP TREATMENT:

Three lines of anti-slip silicon treated on the back of strap assured fastening securely.

ANTI-FOG TREATMENT:

The inner surface of the lens is coated to help maintaining good visibility and prevent fogging.

TO PREVENT FOGGING:

- Clean goggles with a non-abrasive cloth.
- Wipe your face.
- Do not obstruct the ventilation holes when wearing the goggles.

NOTE:

Lenses may still experience some fogging if extreme temperature changes are encountered e.g. moving from warm indoor environment to the outdoors.

ULTRA HD LENS:

The Ultra HD lens design provides an accurate optical vision & wide peripheral vision in all conditions.

STORAGE AND CLEANING:

- Clean your goggles using only with soapy water, do not use chemical products such as solvents or detergents.
- Dry lenses with a soft cloth and then store in a well-ventilated place away from direct sunlight. Do not use paper towels or products that contain cellulose.
- Use only replacement and lenses of RCB X-Series.
- Do not place goggles face down.
- Store the goggles in their cases after use.
- Keep goggles away from direct sunlight.
- Storage temperature should not exceed 50 Degrees.
- Do not scratch goggles if necessary.
- Periodically check goggles to find any damage.
- Contact our customer service for any further information:
Info@mengkah.com
- Do not use tools to remove the lenses.

IMPORTANT:

DO NOT use excessive force when cleaning or wiping the inner surface of the lens as this can cause damage to the anti-fog coating. Mirror coating must be treated with the greatest of care during cleaning. Do not use chemical products such as solvents or detergents to clean the goggles. THE REACTION OF SOLVENTS COULD REDUCE THE RESISTENCE OF THE GOGGLES.

It is strongly recommended the lenses are replaced periodically. Excessive damage or deterioration of the lenses occurs as the protective properties of the lenses cannot be guaranteed.

WARNING:

RCB X-series goggles were designed for off road moto-cross use only. Not suitable for night driving or twilight conditions. Not for official races and competitions.

REMOVING LENS:

- Hold the frame at the bottom and grab the top of the frame from the inside. Gently pull the top of the frame from the lens, to disengage the lens notches from the frame posts.
- Once the top of the lens is separated from the frame, gently pull the lens out of the sides and the bottom of the frame.

INSERTING LENS:


- Start by inserting the lens at the nose, align the notches on the lens with the posts of the frame, make sure the lens is lined up with the groove of the frame. Once lined up, push the lens onto the posts.
- Insert the lens on each side of the frame. Make sure that the lens is pushed completely into the groove of the frame.
- At the top of the frame, align the notches on the lens with the posts on the frame. Make sure the lens is lined up with groove of the frame. Once it is lined up, push the lens onto the posts.
- Check the lens to make sure that it is correctly and fully inserted into the lens slot and that all lens notches are properly engaged with the appropriate frame posts.
- Peel the protective backing from the inside of the lens.

CLEAR VIEW TEAR-OFF SYSTEM INSTALLATION

- Hold your goggle facing you.
- Snap the tear-off securely over post *1 located on the right side of the goggle (in the worn position)
- Snap the tear-off securely over post *2 located on the left side.
- Snap the tear-off securely over post *3 located on the left side.
- Fold tab back over the post so the 4th hole D is also over the post *3.
- Repeat above steps with the next sheet.

LAMINATED TEAR-OFF SYSTEM INSTALLATION

- Hold your goggle as shown on illustration.
- Snap the laminated tear-off securely over post *1 located on the right side of the goggle (in the worn position).
- Snap the laminated tear-off securely over post *2 located on the left side.
- Separate individual tear-offs one at time, starting from the back in the pull tab area. Install the last tear-off over the pin *3 then fold tab back over pin. Repeat until all tear-offs are installed normal use are not covered by.

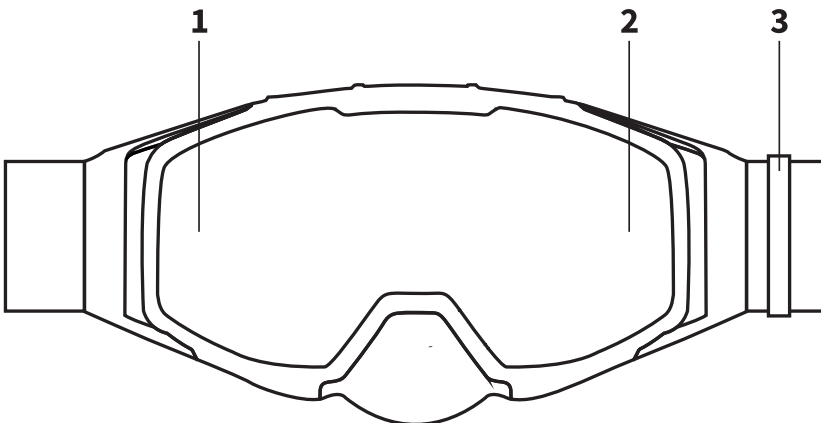



DISTRIBUTED BY:



MENG KAH AUTO PARTS TRADING SDN. BHD.

40, JALAN TPP5, TAMAN PERINDUSTRIAN PUTRA,
47130 PUCHONG, SELANGOR, MALAYSIA.

TEL: +603 5033 5833

FAX: +603 2773 9011

EMAIL: INFO@MENGAH.COM

WEB: WWW.RACINGBOY.COM.MY